

Feature

125# WSP / 200# WOG
 Brass body
 Solder x Solder
 Solder ends (ASME B16.22)
 Screw in bonnet
 Non-rising stem
 Solid wedge disc


Meet BAA requirement

Pressure/ Temperature rating		
200 psi from 32 °F to 160 °F	125 psi max. at 344 °F	



Material

	Part	Material	Specification
1	Body	Brass	ASTM B124 C37700
2	Wedge	Brass	ASTM B124 C37700
3	Bonnet	Brass	ASTM B124 C37700
4	Stem	Brass	ASTM B124 C37700
5	Ring	Brass	ASTM B124 C37700
6	Packing ring	Graphite	WRAS approved
7	Packing nut	Brass	ASTM B124 C37700
8	Handwheel	Aluminum	B85
9	Disk	Aluminum	B85
10	Nut	Steel / Zc plated	A36

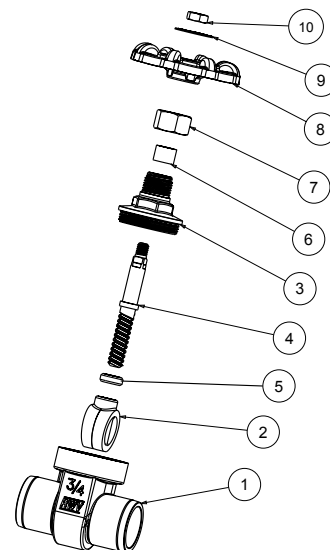

Dimension, Weight

Size	Ø	A [in]	C [in]	H [in]	L [in]	P [in]	Cv	Wt. [lb]
½"	0.627-0.631	1.85	0.50	2.79	2.36	0.51	12.4	0.46
¾"	0.877-0.881	2.44	0.75	3.17	2.36	0.74	27.7	0.78
1"	1.128-1.131	2.83	0.91	3.93	2.75	1.00	56.8	1.14
1¼"	1.378-1.381	3.07	0.97	4.21	3.15	1.25	90.7	1.66
1½"	1.628-1.632	3.38	1.09	4.82	3.15	1.50	137	2.23
2"	2.128-2.132	4.01	1.34	6.27	3.75	2.00	304	4.20

