

DZR Lead Free Brass High Velocity Pump Flange Ball Valve


Feature

400# WOG
 DZR lead free brass body
 Chrome plated ball
 Full port
 1/4-turn operation
 Virgin PTFE seats
 Blow-out proof stem
 3-piece construction
 PEX (F-1960) x Flange
 PEX ASTM F-1960
 Rotating flange design with slotted holes to ensure compatibility with standard and high velocity pumps
 Conical inlet to minimize turbulence
 Designed with side drain valve & cap
 Includes bolt kit, wing handle and gasket
 AB 1953, NSF/ANSI/CAN 61 & 372 certified



Material

	Part	Material	Specification
1	Body	DZR Lead Free Brass	ASTM B927 C27453
2	Fixed End	DZR Lead Free Brass	ASTM B927 C27453
3	Ball	DZR Lead Free Brass	ASTM B927 C27453
4	Seat	PTFE	
5	Flange	Brass	ASTM B283 C37700
6	O-Ring	NBR 70SH	NSF Approved
7	Stem	DZR Lead Free Brass	ASTM B927 C27453
8	Red Handle Fig. 2412ABHV	Steel / Dacromet® Plated	ASTM A36
9	Nut	Steel / Zinc Plated	ASTM A36
10	Ball Valve	DZR Lead Free Brass	ASTM B927 C27453

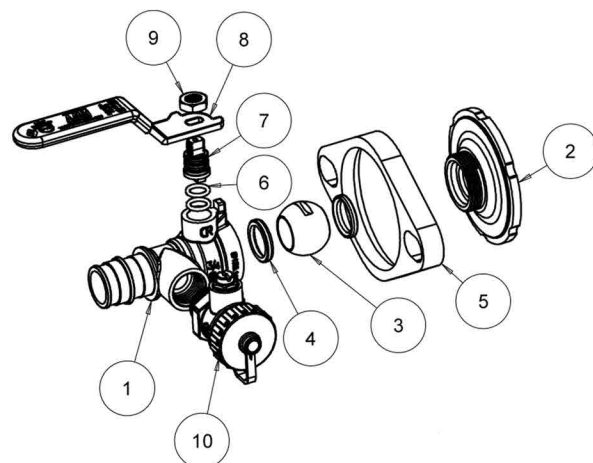

Dimension, Weight

Size (in)	ØA (in)	B (in)	C (in)	D (in)	E (in)	ØF (in)	G (in)	H (in)	I1 (in)	I2 (in)	L (in)	ØP (in)	ØN (in)	ØM	Weight (lb)
3/4"	3/4-PEX F-1960	2.99	4.50	4.13	2.75	0.50	2.46	1.78	3.13	3.50	3.59	0.60	1.50	3/4-11.5 NH	1.09
1"	1-PEX F-1960	3.62	4.67	4.13	2.75	0.50	2.48	1.93	3.13	3.50	3.59	0.80	1.50	3/4-11.5 NH	1.49

