

DZR Lead Free Brass PEX Ball Valve with Mounting Foot

Feature

400# WOG
 DZR lead free brass body
 Mounting foot
 F1960 full port
 Barb (F1960) x Barb (F1960)
 PEX ends (ASTM F1960)
 Chrome plated ball
 Virgin PTFE seats
 Blow-out proof stem
 Double NBR O-ring packing
 CSA B125.14
 AB1953, NSF/ANSI/CAN 61 & 372 certified

Available in the following options:


- base design (5015AB)
- with drain (5015ABD)
- with drain & mounting foot (5015ABDF)
- with wing handle (5015ABW)

Pressure/ Temperature rating		
300 psi from 15 °F to 160 °F	150 psi max. at 200 °F	



Material

	Part	Material	Specification
1	Body	DZR Lead Free Brass	ASTM B927 C27453
2	End piece	DZR Lead Free Brass	ASTM B927 C27453
3	Ball	DZR Lead Free Brass / Cr plated	ASTM B927 C27453
4	Seat	PTFE	PTFE
5	Stem	DZR Lead Free Brass	ASTM B927 C27453
6	O-ring	NBR	NSF approved
7	Handle	Steel / Dacromet® plated	ASTM A36
8	Handle nut	Steel / Zn plated	ASTM A36

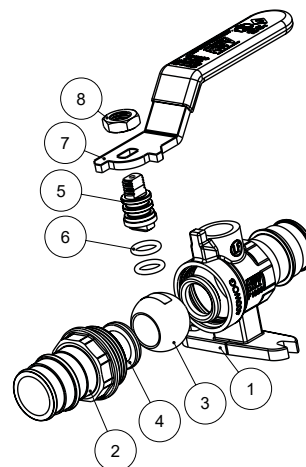

Dimension, Cv, Weight

Size	A [in]	H [in]	L [in]	L1 [in]	T [in]	P [in]	Wt. [lb]
1/2"	2.48	1.38	3.19	0.93	3.19	0.39	0.38
3/4"	3.23	1.77	3.58	1.00	3.58	0.50	0.52
1"	3.86	1.85	3.58	1.16	3.58	0.73	0.75

