


### COIL DIAGRAM

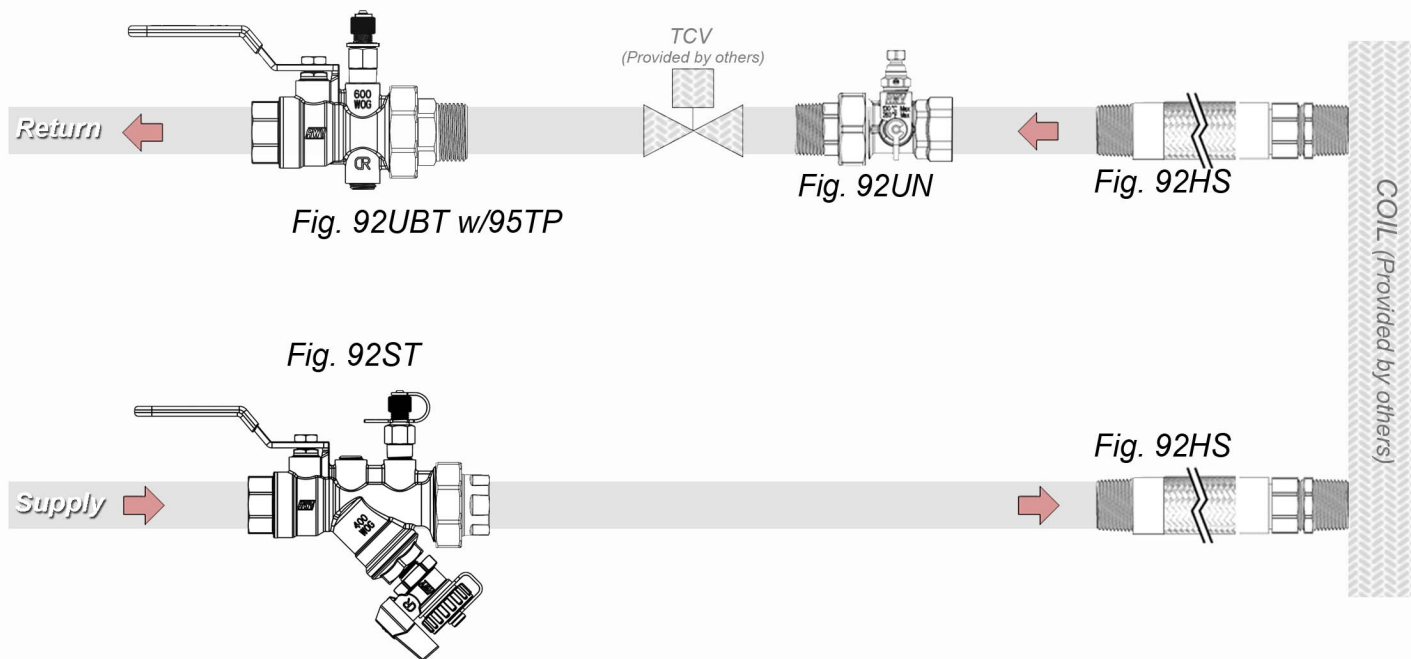

### COMPONENT INFORMATION

- 92ST** Combination ball valve / Y-strainer with blow down valve and P/T port, Full Port, DZR brass body, Chrome plated brass ball, 20 mesh SS screen, 400# WOG, 260°F
- 92HS** Flexible Hoses, MNPT fixed end x swivel end, EPDM core, SS Braided, EPDM gaskets, 350# WOG (300# WOG for 1 1/2" - 2"), 250°F
- 92UN** Union with manual air vent and P/T port, DZR brass body, EPDM o-ring, 400# WOG, 260°F
- 92UBT** Union ball valve ,Full port, DZR Brass, Chrome plated brass ball, FNPT end / union end, 600# WOG, 260°F
- 95TP** Test Point, DZR Brass and EPDM Perox, 400# WOG, 260°F

PROJECT	
CONTRACTOR	
PO / JOB#	
MECHANICAL DETAIL	
ENGINEER	
DISTRIBUTOR	
REPRESENTATIVE	
DATE	



## ORDERING OPTIONS

## Supply/Return Line Size

☐ 1/2"    ☐ 3/4"    ☐ 1"  
☐ 1-1/4"    ☐ 1-1/2"    ☐ 2"

## Supply/Return Connection

☐ FNPT    ☐ Sweat  
☐ Press

## Coil Connection Size

☐ 3/8"    ☐ 1/2"    ☐ 3/4"    ☐ 1"  
☐ 1-1/4"    ☐ 1-1/2"    ☐ 2"

Note: For copper connection    7/8" O.D. = 3/4"  
Male / Sweat / "L" type copper    5/8" O.D. = 1/2"  
1/2" O.D. = 3/8"

## Coil Connection

☐ FNPT    ☐ MNPT  
☐ Sweat

## TCV Connection Size

☐ 1/2"    ☐ 3/4"    ☐ 1"  
☐ 1-1/4"    ☐ 1-1/2"    ☐ 2"

## TCV Connection

☐ MNPT  
☐ Sweat

## Hoses (92HS)

☐ No    ☐ 12"    ☐ 18"  
☐ 24"    ☐ 36"

## Stem Extensions / PT Port Extensions

☐ Yes    ☐ No

## Drain Valve


☐ No

☐ 5080B

☐ 241DV 1/4"

☐ 241DV 3/8"

☐ 241DV 1/2"



## Automatic Air Vent

☐ No

☐ 9390N 1/4"

☐ 9390N 3/8"

☐ 9390N 1/2"



## APPROVAL

## NOTES: