ECO-VALVE

236AB

DZR Lead Free Brass Threaded Ends Swing Check Valve

Feature

125# WSP / 300# CWP
DZR lead free brass body
DZR lead free brass disc
FNPT x FNPT
Threaded ends (ASME B1.20.1-NPT)
Swing check
"Y" Pattern
MSS-SP-139
AB1953, NSF/ANSI/CAN 61 & 372 certified


Meet BAA requirement



Pressure/ Temperature rating	
300 psi from 15 °F to 160 °F	125 psi max. at 344 °F


Material

	Part	Material	Specification
1	Body	DZR Lead Free Brass	C85660
2	Retaining disc	DZR Lead Free Brass	ASTM B927 C27453
3	Stem	Lead Free Brass	ASTM B927 C27450
4	Screw	Lead Free Brass	ASTM B927 C27450
5	Gasket	PTFE	NSF approved
6	Cap	DZR Lead Free Brass	ASTM B927 C27453
7	Disc	Aluminum	-

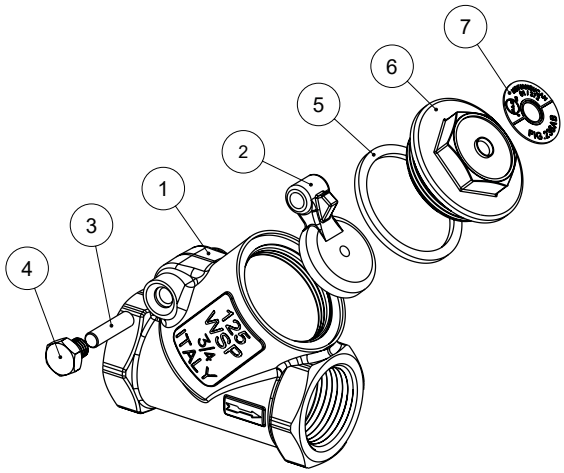

Dimension, Cv, Weight

Size	DN	A [in]	C [in]	H [in]	P [in]	S [in]	Cv [gal]	Wt. [lb]
½"	½ - 14 NPT	2.21	0.39	1.65	0.59	1.10	5.33	0.584
¾"	¾ - 14 NPT	2.76	0.51	1.97	0.75	1.34	10.5	0.930
1"	1 - 11.5 NPT	3.15	0.64	2.28	0.98	1.61	19.0	1.38
1¼"	1¼ - 11.5 NPT	3.78	0.66	2.71	1.26	1.97	32.8	2.15
1½"	1½ - 11.5 NPT	4.33	0.69	3.19	1.50	2.24	50.6	2.97
2"	2 - 11.5 NPT	5.04	0.73	3.86	1.97	2.76	88.1	4.82

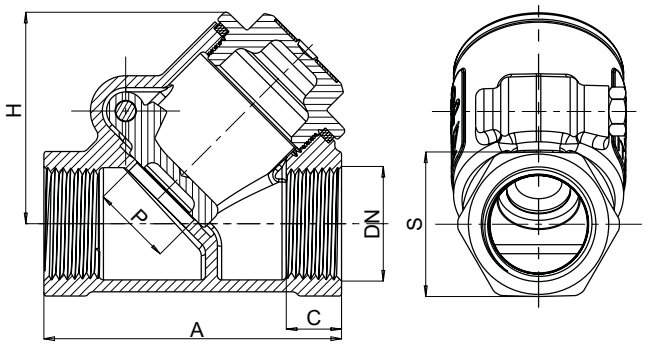

WARNING:Thisproductcanexposeyoutochemicalsincludinglead,whichisknowntotheStateofCaliforniato causecancerandbirthdefectsorotherreproductiveharm.Formoreinformationgotowww.P65Warnings.ca.gov.

Drawings, photos and data are provided for information only and subject to change without notice. No part of this document may be reproduced, copied, modified or adapted, without the prior written consent of the copyright owner, unless otherwise indicated.
The Drinking Water Act has defined lead free as having the average wetted surface ratio of the fixture to contain less than .25% of lead per volume.

© 2025 RED-WHITE VALVE CORP. All Rights Reserved