236ABT

DZR Lead Free Brass Threaded Ends Swing Check Valve

Feature

125WSP / 300 PSI
DZR lead free brass body
DZR lead free brass disc
FNPT x FNPT
Threaded ends (ASME B1.20.1-NPT)
Swing Check
PTFE seat gasket
"Y" Pattern
MSS-SP-139
NSF/ANSI/CAN 61 & 372 certified

Working Conditions:
300PSI from 15°F - 160°F
125PSI max at 344°F

Meets BAA requirements

NSF/ANSI/CAN 61 / 372

DZR Dezincification Resistant

Certified LEAD FREE

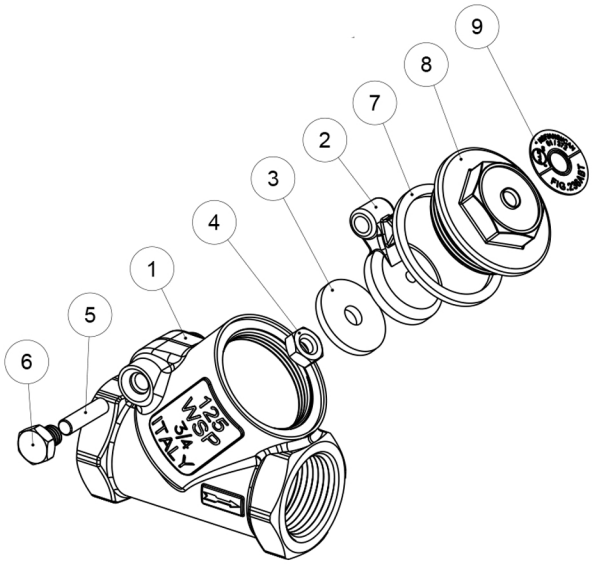

Material

	Part	Material	Specification
1	Body	Brass	UNS C85660 (DZR AB)
2	Retaining Disk	Brass	ASTM B927 C27453 (DZR AB)
3	Gasket	PTFE	PTFE NSF Approved
4	Nut	Stainless Steel	Stainless Steel AISI 316
5	Stem	Brass	ASTM B927 C27450 (AB)
6	Screw	Brass	ASTM B927 C27450 (AB)
7	Gasket	PTFE	Modified PTFE NSF Approved
8	Cap	Brass	ASTM B927 C27453 (DZR AB)
9	Disk	Aluminum	

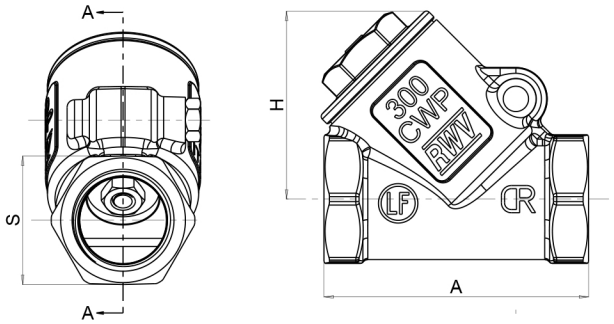

Dimension

Size (in)	A (in)	C (in)	H (in)	P (in)	S (in)	Cv (gal)	Weight (lb)
1/2"	2.21	0.39	1.65	0.59	1.10	5.33	0.58
3/4"	2.76	0.51	1.97	0.75	1.34	10.50	0.93
1"	3.15	0.64	2.28	0.98	1.61	19.00	1.36
1 1/4"	3.78	0.66	2.71	1.26	1.97	32.80	2.17
1 1/2"	4.33	0.69	3.19	1.50	2.24	50.60	2.98
2"	5.04	0.73	3.86	1.97	2.76	88.1	4.83

WARNING: This product can expose you to chemicals including lead, which is known to the state of California to cause cancer and birth defects or other reproductive harm. For more information go to www.P65Warnings.ca.gov

Drawings, photos and data are provided for information only and subject to change without notice. No part of this document may be reproduced copied, modified or adapted, without the prior written consent of the copyright owner, unless otherwise indicated.
The drinking Water Act has defined lead free as having the average wetted surface ratio of the fixture to contain less than .25% of lead per volume.
© 2026 RED-WHITE VALVE CORP. All Rights Reserved