

Stainless Steel Full Port Ball Valve

Feature

100# WSP / 1000# WOG
 Stainless steel body 2-piece
 Full port
 Threaded Ends FNPT x MNPT (ASME B.16.34)
 Reinforced PTFE seats
 Blow-out proof stem
 Locking handle
 MSS SP-110
 API 598


Working conditions

- -4°F to 356°F



Material

	Part	Material	Specification
1	Body	Stainless Steel	CF8M
2	Cap	Stainless Steel	CF8M
3	Seat		RPTFE
4	Joint Gasket		PTFE
5	Thrust Washer		PTFE
6	Packing		PTFE
7	Gland	Stainless Steel	ASTM - SS304
8	Nut	Stainless Steel	ASTM - SS304
9	Stem	Stainless Steel	ASTM - SS316
10	Ball	Stainless Steel	ASTM - SS316
11	Handle	Stainless Steel	ASTM - SS304
12	Handle Cover		PVC

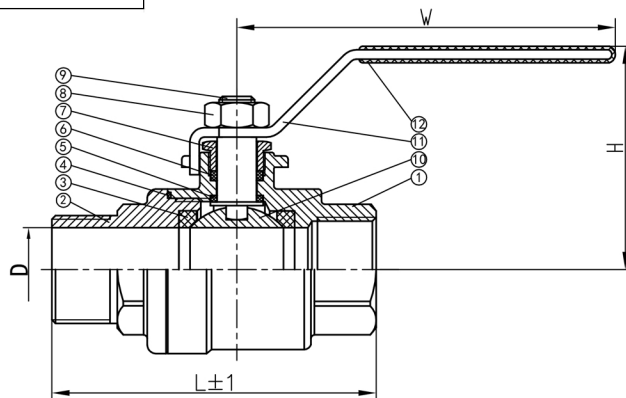

Dimension, Weight

Size (in)	D (in)	L (in)	H (in)	W (in)	Weight (lb)
1/4"	0.28	2.48	1.89	3.59	0.44
3/8"	0.45	2.48	1.89	3.59	0.42
1/2"	0.59	2.58	2.20	4.06	0.51
3/4"	0.79	2.78	2.44	4.72	0.71
1"	0.98	3.52	2.56	4.72	1.10
1 1/4"	1.26	4.02	2.91	4.92	1.95
1 1/2"	1.5	4.29	3.35	6.38	2.51
2"	1.93	4.9	3.7	6.77	3.6



WARNING: THIS PRODUCT CAN EXPOSE YOU TO CHEMICALS INCLUDING LEAD, WHICH IS KNOWN TO THE STATE OF CALIFORNIA TO CAUSE CANCER AND BIRTH DEFECTS OR OTHER REPRODUCTIVE HARM. FOR MORE INFORMATION GO TO WWW.P65WARNINGS.CA.GOV

DRAWINGS, PHOTOS AND DATA ARE PROVIDED FOR INFORMATION ONLY AND SUBJECT TO CHANGE WITHOUT NOTICE. NO PART OF THIS DOCUMENT MAY BE REPRODUCED COPIED, MODIFIED OR ADAPTED, WITHOUT THE PRIOR WRITTEN CONSENT OF THE COPYRIGHT OWNER, UNLESS OTHERWISE INDICATED. THE DRINKING WATER ACT HAS DEFINED LEAD FREE AS HAVING THE AVERAGE WETTED SURFACE RATIO OF THE FIXTURE TO CONTAIN LESS THAN .25% OF LEAD PER VOLUME.