5065AB

Lead Free Brass Full Port Ball Valve

Feature


600# WOG
Lead free brass body
Full port
Adjustable packing
Compression ends
Blow-out proof stem
Chrome plated ball
Virgin PTFE seats
MSS-SP-110
AB1953, NSF/ANSI 61 & 372 certified



Pressure/ Temperature rating	
600 psi from 15 °F to 160 °F	150 psi max. at 200 °F


Material

	Part	Material	Specification
1	Body	Lead Free Brass	ASTM B927 C28450
2	End piece	Lead Free Brass	ASTM B927 C28450
3	Ball	Lead Free Brass / Cr plated	ASTM B927 C28450
4	Seat	PTFE	PTFE
5	Stem	Lead Free Brass	ASTM B927 C28450
6	O-ring	FKM	-
7	Packing	PTFE	PTFE
8	Packing nut	Brass	ASTM B124 C37700
9	Handle	Steel	A36
10	Handle nut	Steel / Zn plated	A36
11	Compression Nut	NBR	NSF approved
12	Ferrule	Brass	ASTM B124 C37700

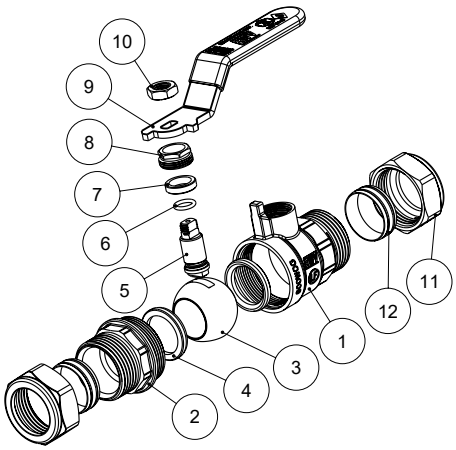

Dimension, Weight

Size	Φ [in]	A [in]	A1 [in]	C [in]	H [in]	L [in]	P [in]	Wt. [lb]
½"	0.627-0.631	2.81	2.16	0.50	1.93	3.59	0.50	0.52
¾"	0.877-0.881	3.20	2.50	0.55	2.06	3.59	0.73	0.72
1"	1.128-1.131	3.84	3.00	0.63	2.35	4.97	0.94	1.20

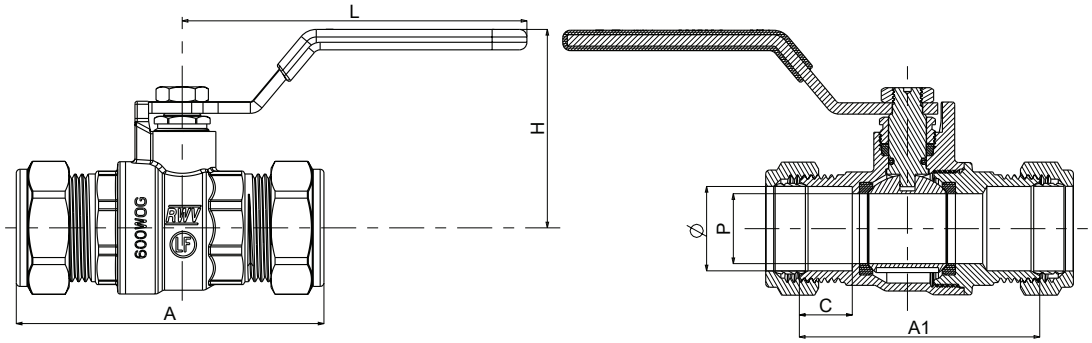

WARNING:Thisproductcanexposeyoutochemicalsincludinglead,whichisknowntotheStateofCaliforniato causecancerandbirthdefectsorotherreproductiveharm.Formoreinformationgotowww.P65Warnings.ca.gov.

Drawings, photos and data are provided for information only and subject to change without notice. No part of this document may be reproduced, copied, modified or adapted, without the prior written consent of the copyright owner, unless otherwise indicated.
The Drinking Water Act has defined lead free as having the average wetted surface ratio of the fixture to contain less than .25% of lead per volume.
© 2020 Red-White Valve Corp. All Rights Reserved